

Metal Diaphragm Diff. Press. Switches

Type **DPD1T-.../DPD2T-...**

Mechanical single/dual pressure switch
Repeatability $\pm 1.0\%$ at constant temperature

Features

Metal diaphragm pressure switches
 Wetted parts welded.
 Direct action, no friction, high accuracy

Adjustment ranges

0.02 ... 10.2 bar, differential pressure

Applications

Machine and tool engineering,
 Autoclaves,
 Pump control,
 Refrigerant monitoring,
 Ship building applications



Index: E

Technical Data

Wetted parts:	Stainless steel 17-7PH Aluminium, nickel-plated O-rings: FKM
Repeatability:	$\pm 1\%$ at constant temperature
Switching rate:	max. 20/min
Temperature range:	-40 °C... +75 °C
Protection class:	IP65
Housing:	Aluminium, anodized
Process connection:	1/8" NPT female thread
Electrical connection:	Internal terminal strip (0.5-2.5 mm ²) Standard: WAGO terminal and cable gland M20 x 1.5; clamping range $\varnothing 5 \dots 11$ mm

Electrical ratings and hysteresis:	A large variety of micro switches offers different electrical ratings and hysteresis for many applications.
Weight:	DPD1T-....: approx. 1.6 kg DPD2T-....: approx. 1.7 kg
Set point adjustment:	Turn the adjustment screw clockwise to decrease the set point
Intrinsically safe:	The switches are designed for intrinsically safe applications. Please add "Exi" to your ordering details when placing an order. To comply with the intrinsically safe approval following max. ratings must not be exceeded: <div style="text-align: right;"> U_{max} = 28 V I_{max} = 50 mA </div>
Approval:	---

Pressure ranges

* Static operating pressures up to 28 bar possible. Differential pressure of the adjustable range must not be exceeded.

Pressure range code	Adjustment range [bar] *		Max. operating pressure [bar]	Proof pressure [bar] (short term)	Max. hysteresis of switch types in bar (end of range)		
	Increasing press.	Decreasing press.			H, GH [bar]	M, GM [bar]	
Overpressure							
3SS	0.02 ... 0.2	0.002 ... 0.2	0,5	0.7	0.004	0.01	
18SS	0.05 ... 1.2	0.030 ... 1.2	3,0	4.0	0.010	0.04	
80SS	0.40 ... 5.4	0.030 ... 5.2	8,0	10.7	0.100	0.22	
150SS	0.70 ... 10.2	0.100 ... 9.7	15,0	20.0	0.180	0.40	


Specifications are subject to changes without notice.

Pressure

Metal Diaphragm Diff. Press. Switches

Type **DPD1T-.../DPD2T-...**

Dimensions (in mm / inch)

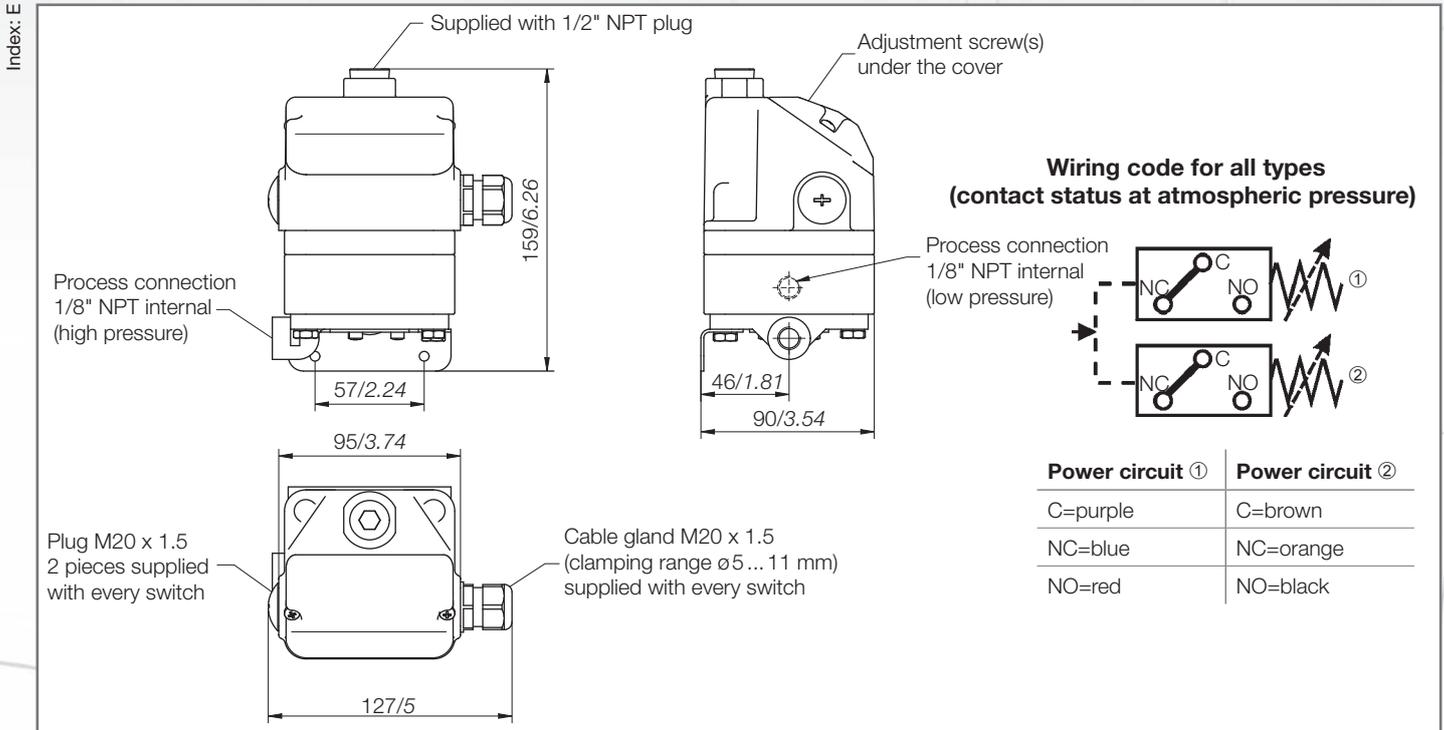

Electrical ratings

Micro switch	Special features	Volt AC 50/60 Hz	Ind. load A	Res. load A	Volt DC	Ind. load A	Res. load A	Comments
H	Micro switch with silver contacts	125 250	10 10	10 10	6 to 24	0.50	0.5	Small hysteresis; High AC-/ low DC-load
M	Micro switch with silver contacts	125 250	10 10	10 10	12 24 250	5.00 1.00 0.25	15.0 2.0 0.4	Medium hysteresis; High AC- and DC-loads
GH	Micro switch with gold-plated contacts for low voltage and/or low current	125	1	1	24	1.00	1.0	Small hysteresis
GM		30	0.1	0.1	30	0.10	0.1	Medium hysteresis

480 V AC and 15 A only upon request

Options

DPD1T-...		DPD2T-...	
ST1	Plug, 3-pin + E, DIN EN 175 301-801-A (prev. DIN 43650)	ST3	Plug, 6-pin + E, DIN EN 43651
ST2	Amphenol plug 4-pin + E	EXI	for intrinsically safe application
EXI	for intrinsically safe application		

Ordering

Example for order number



Your order number

